


Champion Pump CPU16 – 1/6HP Utility Pump



- 1/6hp PSC Motor
 - Higher starting torque
 - Low amp, Runs cooler & quieter, Has longer life
 - Air filled
- Upper And Lower Ball Bearings
- Plastic Corrosion Resistant Housing
- 3/8" Solids
- Secondary Screen
 - Pumps down to 1/8" without secondary screen.
- 10' Power Cord
- Manual

CHAMPION PUMP PUMP PERFORMANCE CURVE

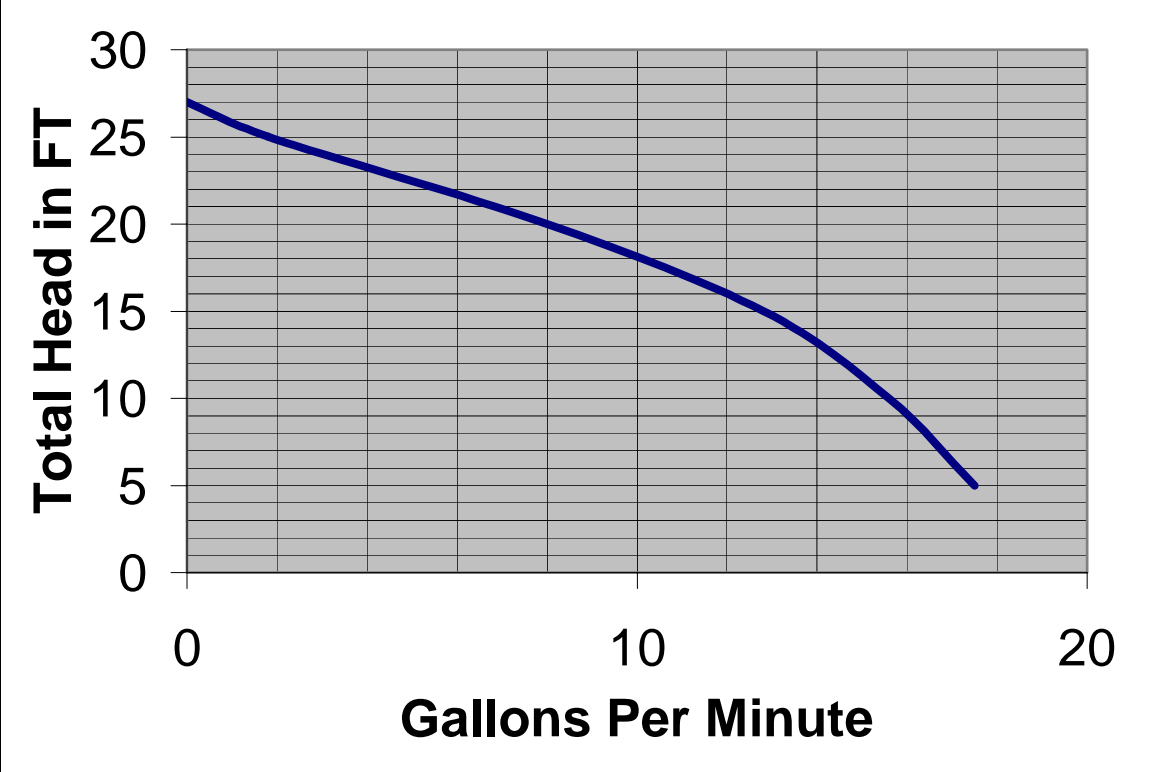

Champion Pump Company, Inc.
400 Orange Street
Ashland, OH 44805
Phone: 419-207-3960
Rev. 12/19/2005

Champion Pump CPU16 – 1/6HP Utility Pump

DISCHARGE	3/4" GHT
LIQUID TEMPERATURE	140 Degrees F. (Intermittent)
HOUSING	High Impact Corrosion Resistant
IMPELLER	Nylon + 30% Fiber Glass
SHAFT	Hardened Steel
SHAFT SEAL	Mechanical Carbon - Rotating Face Ceramic - Stationary Face Buna-N -Elastomer 300 Series Stainless Steel - Hardware
BEARING (UPPER & LOWER)	Single Row, Ball. Oil Lubricated
HARDWARE	300 Series Stainless Steel
SQUARE RINGS	Buna-N
CORD	(UL/CUL) Listed 16 AWG, Type SJTW 10' Length
CORD ENTRY	Compression Grommet - Outer Jacket Seal
MOTOR (SINGLE PHASE)	1/6 HP, 3450 RPM. 60 Hz NEMA L Includes Overload Protection In The Motor. Oil Filled, Class B Permanent Split Capacitor
Weight	7 Lbs (Manual)

Model	HP	Volts	Phase	Amps	Cord Length	Switch
CPU16-11	1/3	115	1	2.0	10	Manual

Champion Pump Company, Inc.
 400 Orange Street
 Ashland, OH 44805
 Phone: 419-207-3960
 Rev. 12/19/2005